

ABS | Upright Cabinets

REFRIGERATED UPRIGHT ► INOX



QRX 400

| | | | | | |
|--|---------------------|--|-----------|----------------------------|----------|
| | GAS R600a | | 60 mm | 4 CLIMATIC CLASS | 38°C |
| | | | | | |

DETAILS



Digital Thermostat

Lock fitted as standard


GENERAL FEATURES

- 400 Lt. Refrigerated upright
- Gray coated plate external cabinet and door in stainless steel, thermoformed internally
- Roll-bond evaporator system with fan assisted cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (60mm per side)
- Digital Thermostat
- Removable Gasket
- Reversible door
- Handle along door profile
- Doors lock fitted as standard
- Adjustable shelves: 4 Pcs + 1 BOTTOM Shelf
- N.2 Adjustable feet + N.2 Rollers at the back
- Energy efficiency class: D

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|---------------------|
| Capacity | 400 L |
| Temperature | +2°C - +10°C |
| Consumption | 1.71 kWh/24h |
| Rated Power | 200 W |
| Noise level | 57 dB(A) |
| Net Weight | 62 Kg |
| Gross Weight | 71 Kg |
| External Dimensions (WxDxH mm) | 600x685x1890 |
| Internal Dimensions (WxDxH mm) | 480x540x1680 |
| Packaging dimensions (WxDxH mm) | 632x737x2030 |
| Loading quantities 20'/40'/40'HQ | 27/54/54 |

PRODUCT DIMENSIONS

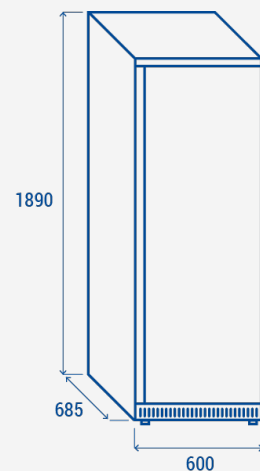

CERTIFICATION

CE RoHS



COOL HEAD EUROPE
We make the world a cooler place



www.coolheadeurope.com